

APPROVED	O.G. F.G.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

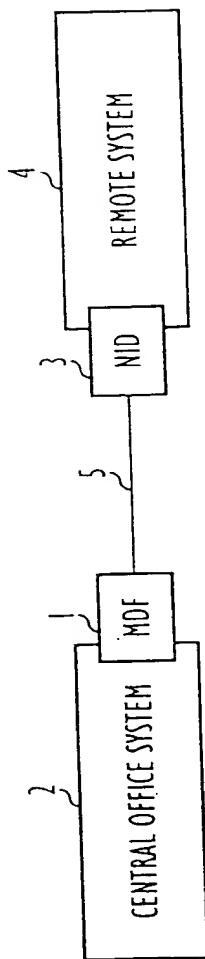


FIG. 1

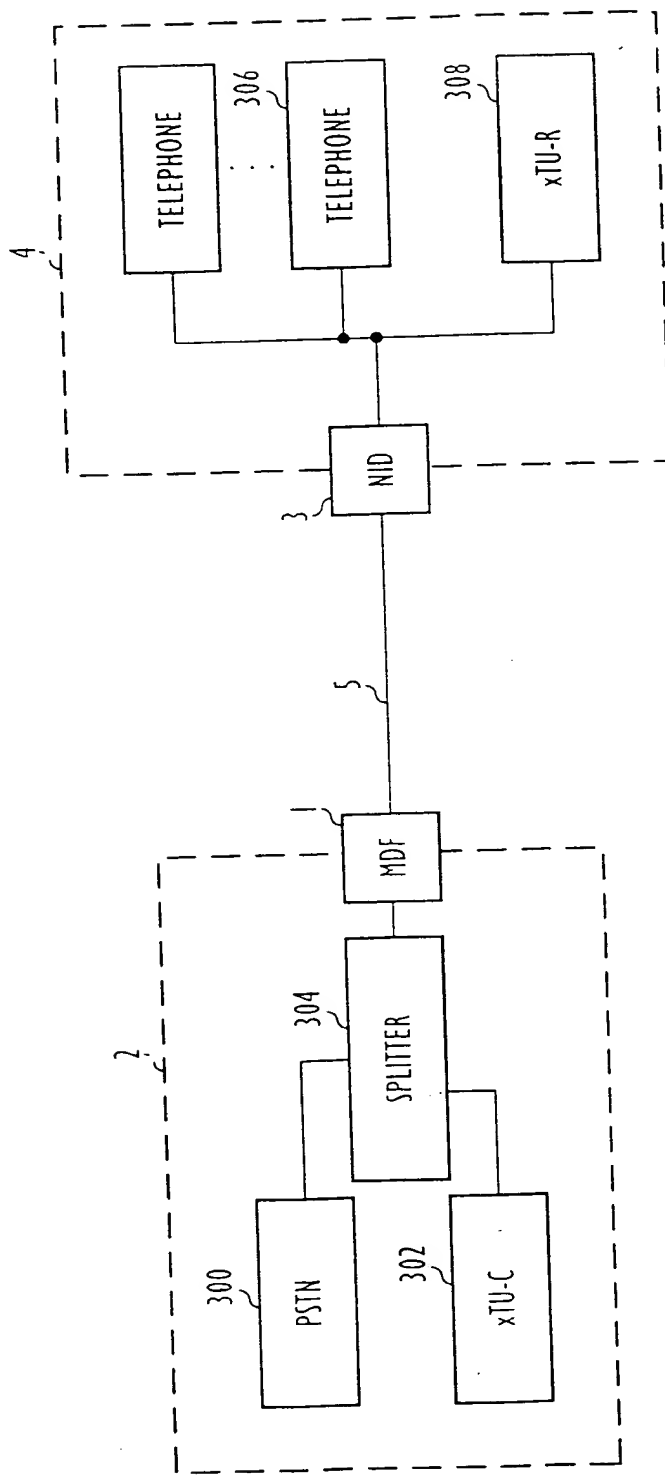


FIG. 2

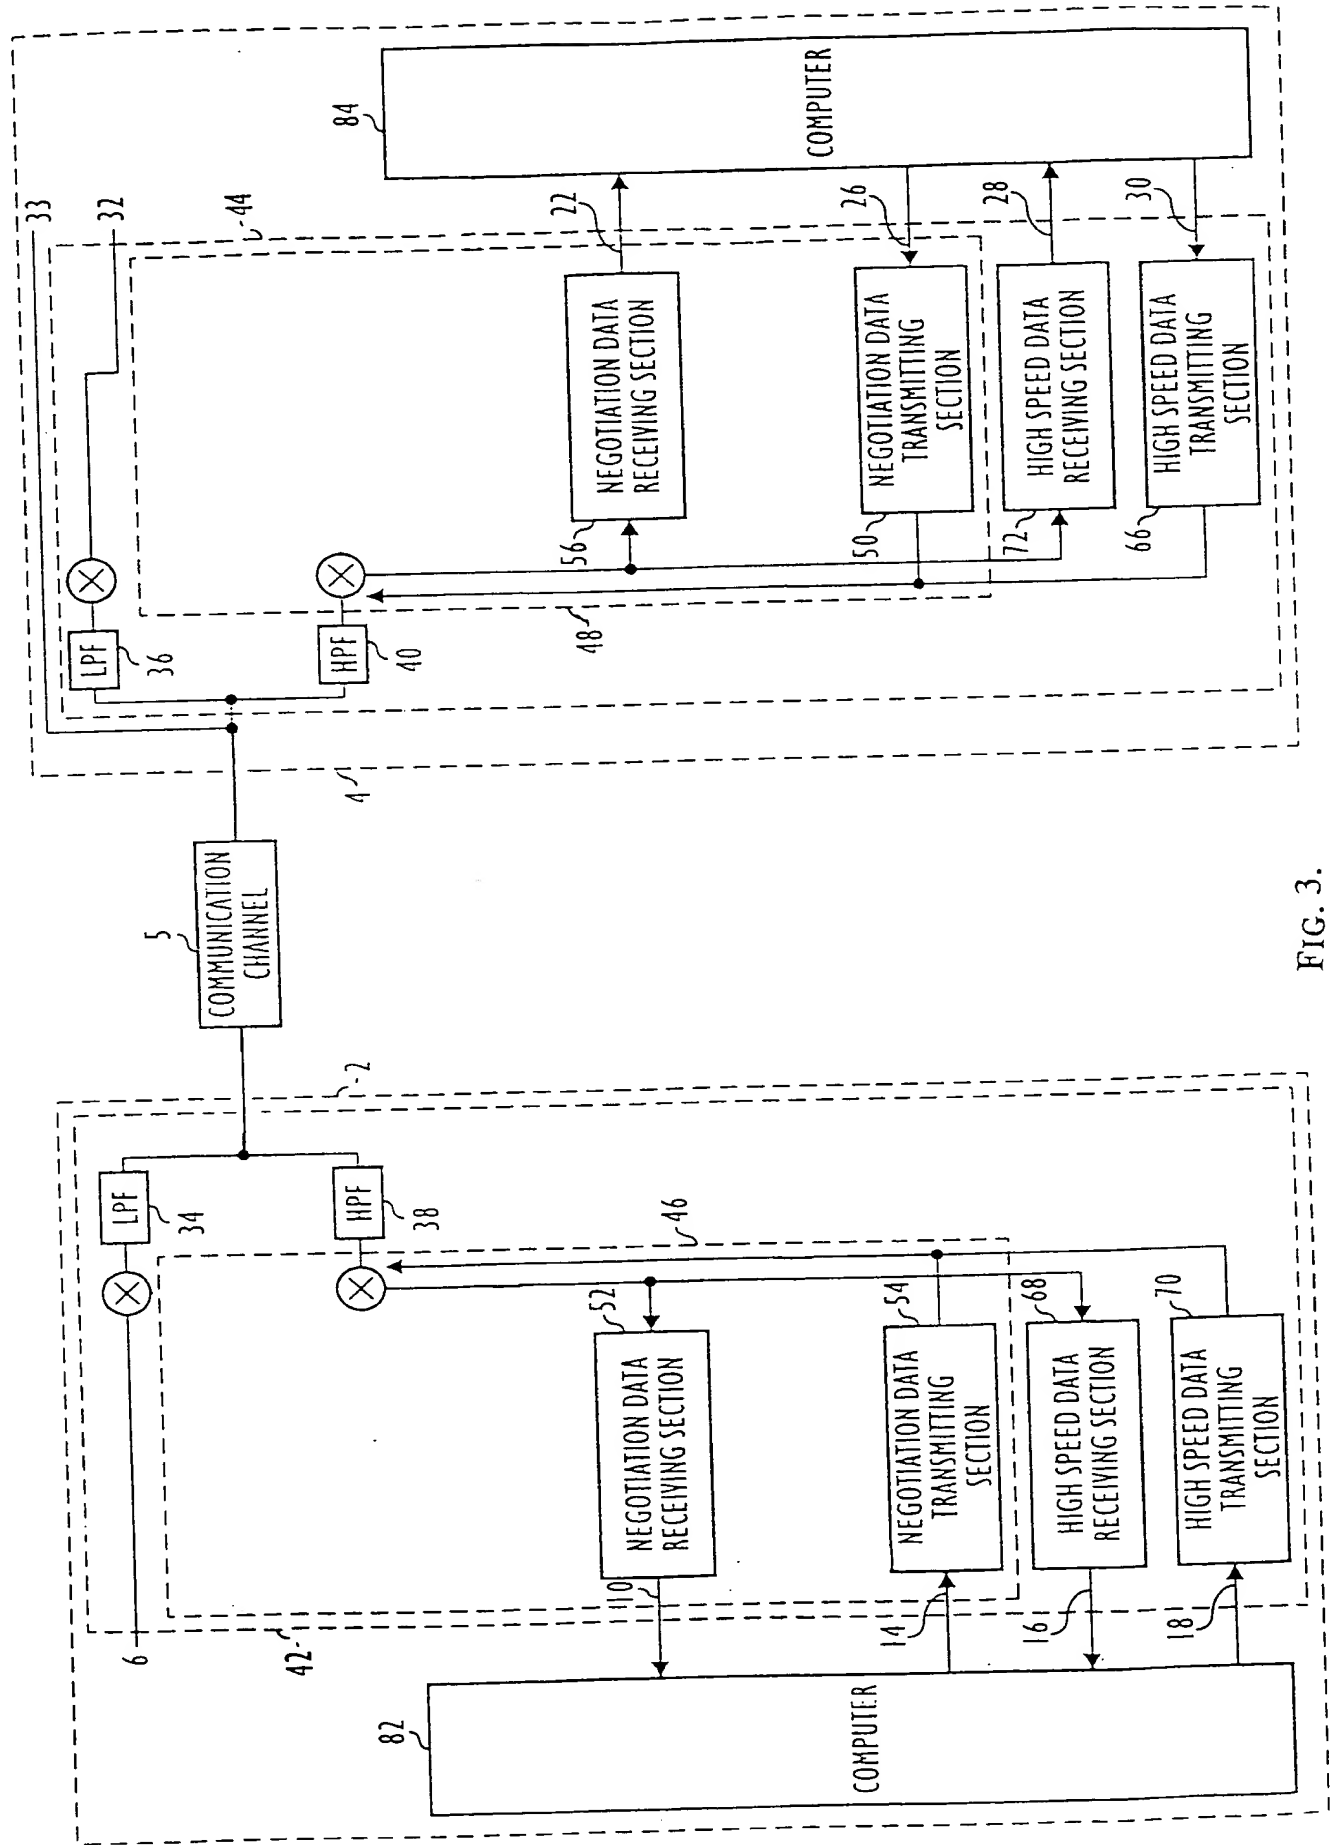


FIG. 3.

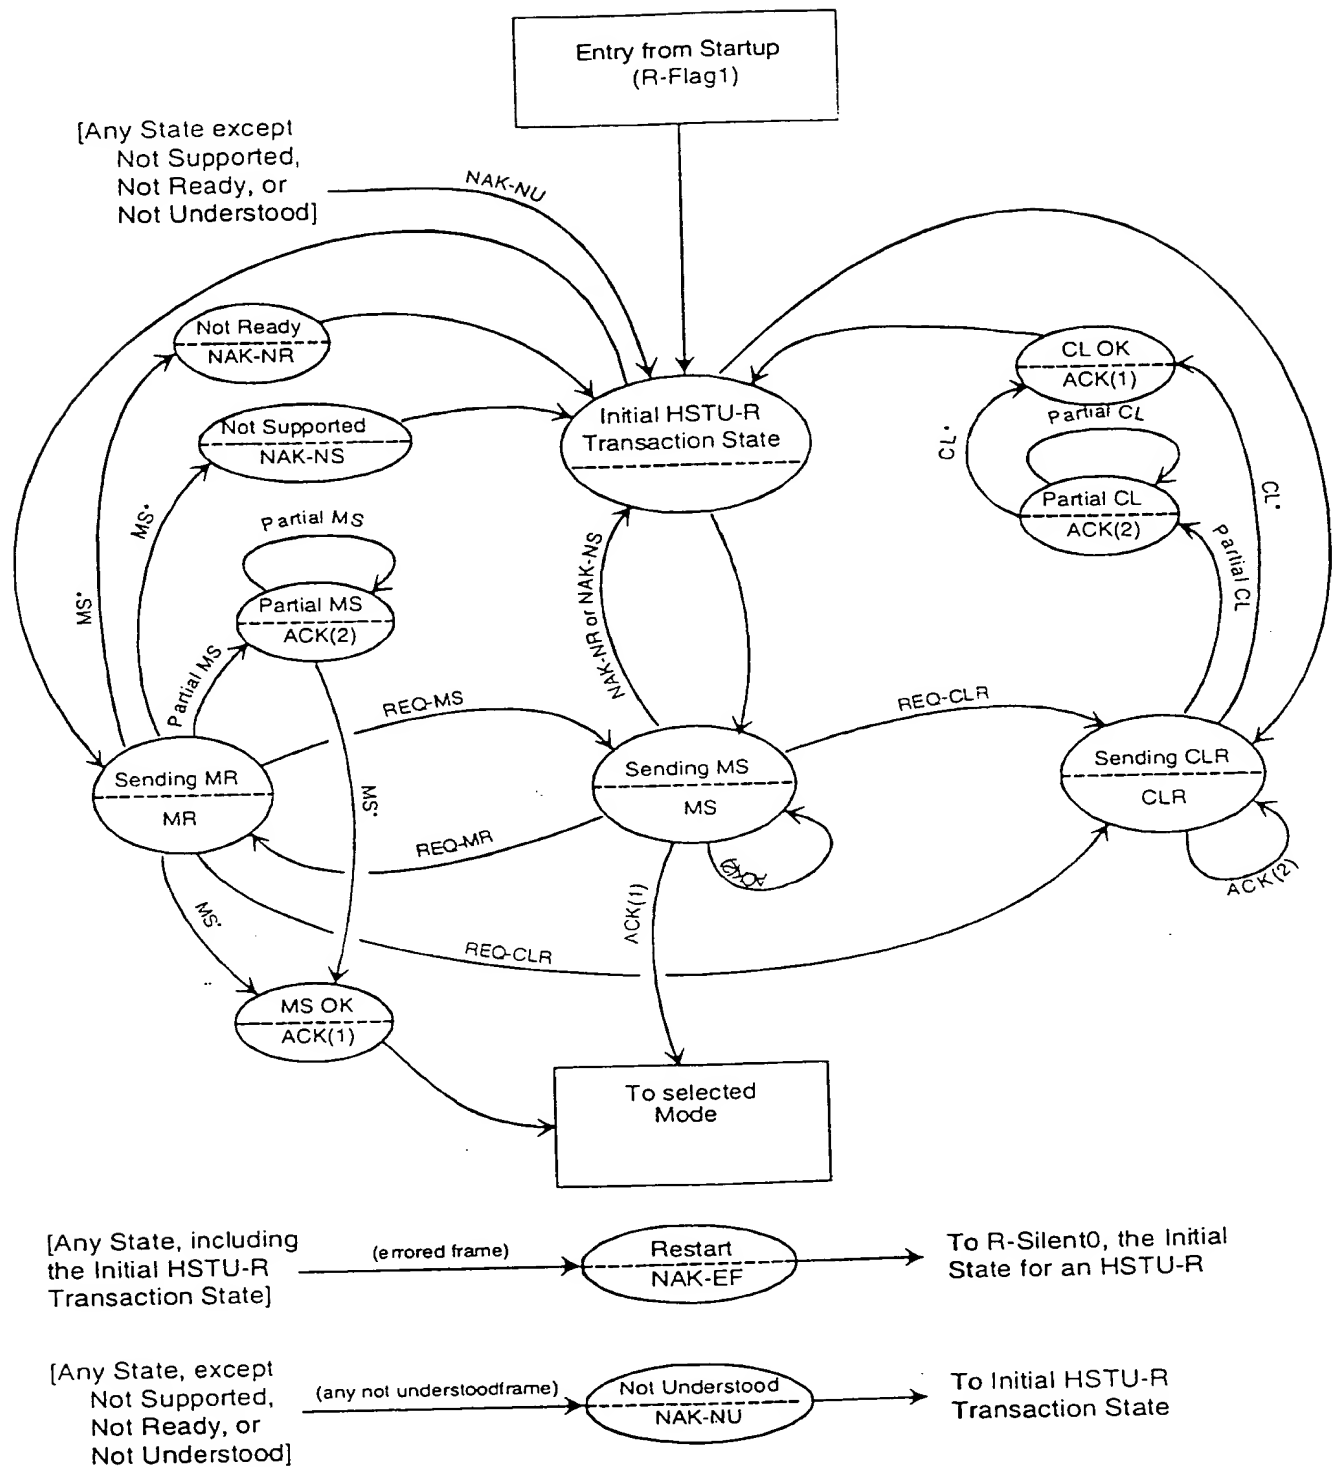


FIG. 4 .

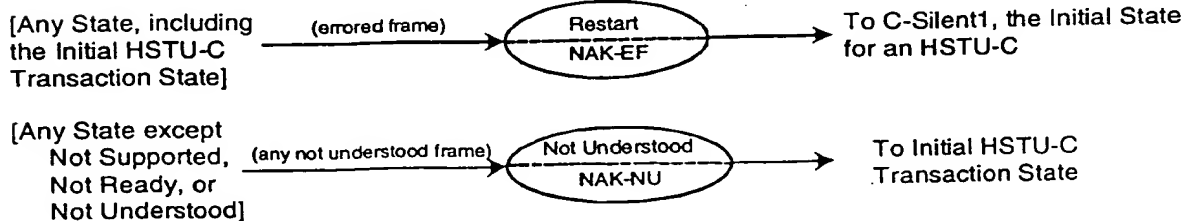
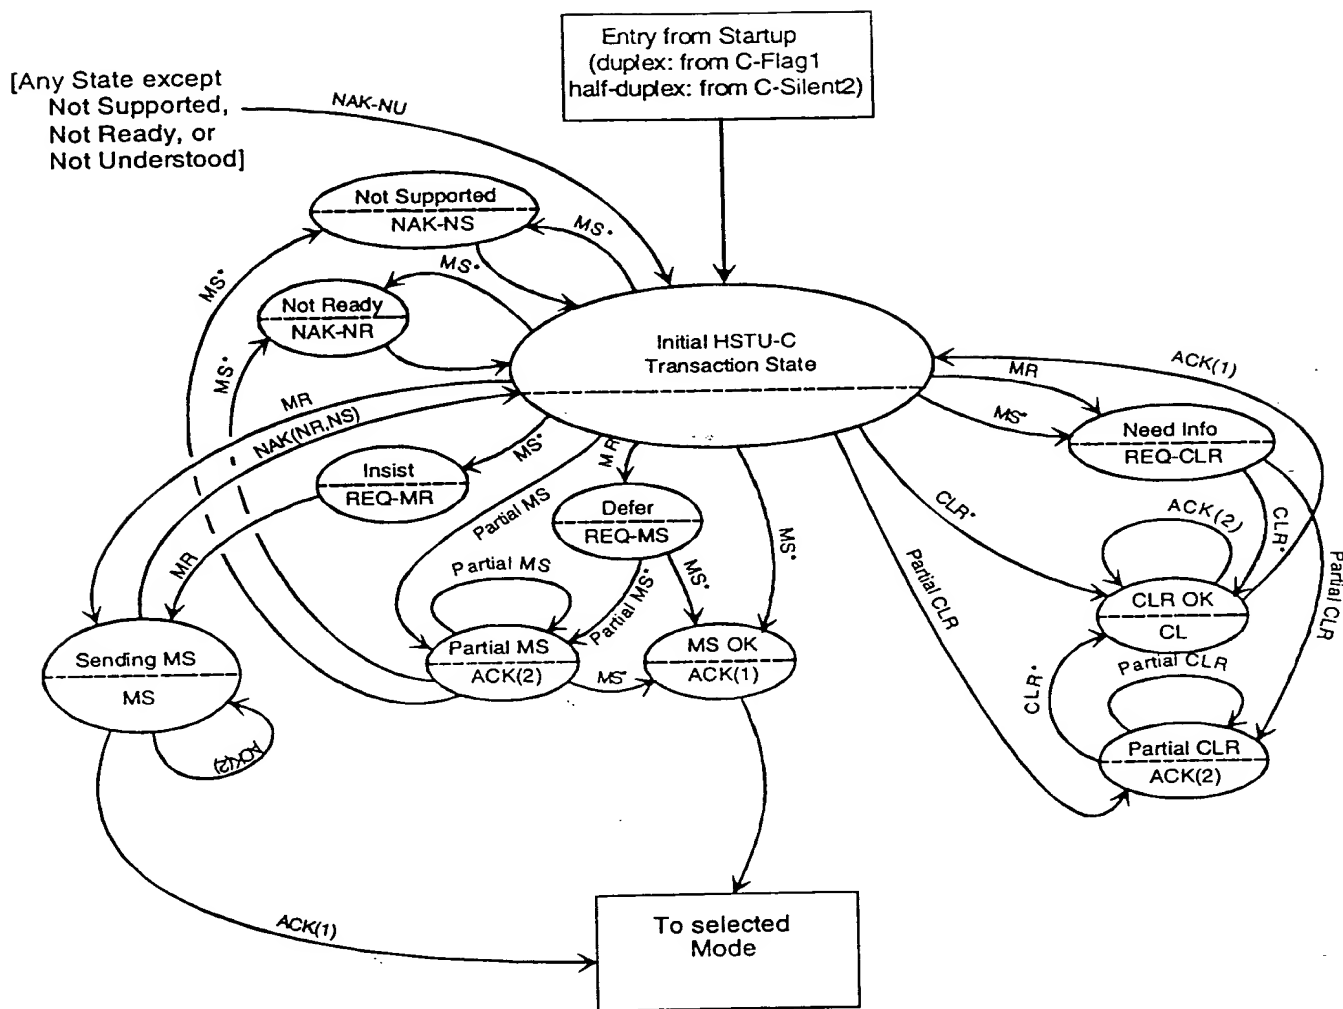


FIG. 5.

APPROVED	O.G. PG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

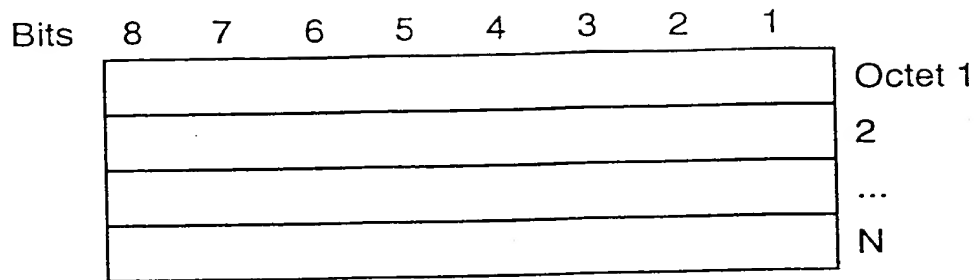


FIG. 6.

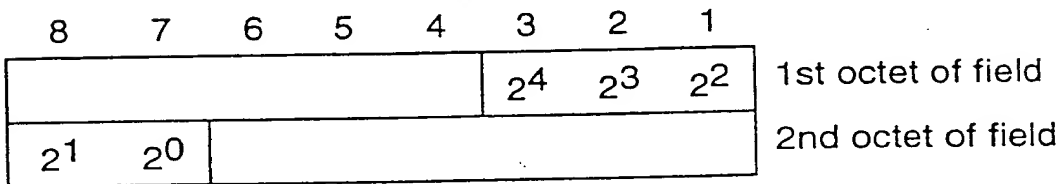


FIG. 7.

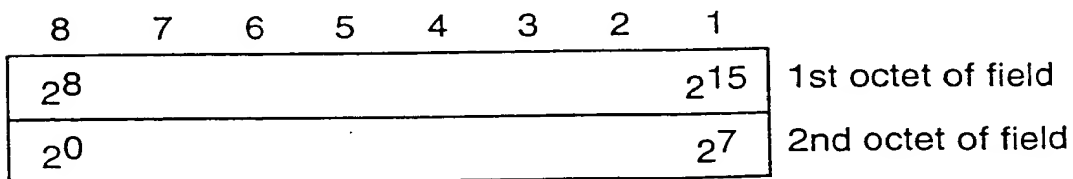


FIG. 8.

0924191-0330 "SECRET" 0924191-0330

APPROVED	O.G. FIG.	
BY	CLASS	SUBJECT
DRAFTSMAN		

090313-0319


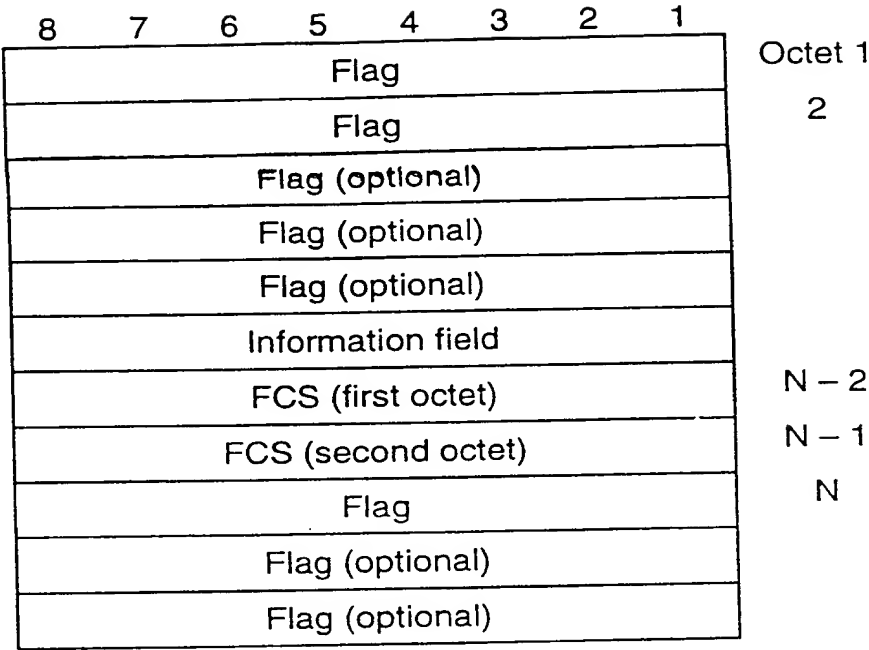


FIG. 9.

Identification (I) field	Standard information (S) field	Non-standard information (NS) field
-----------------------------	-----------------------------------	--

FIG. 10.

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

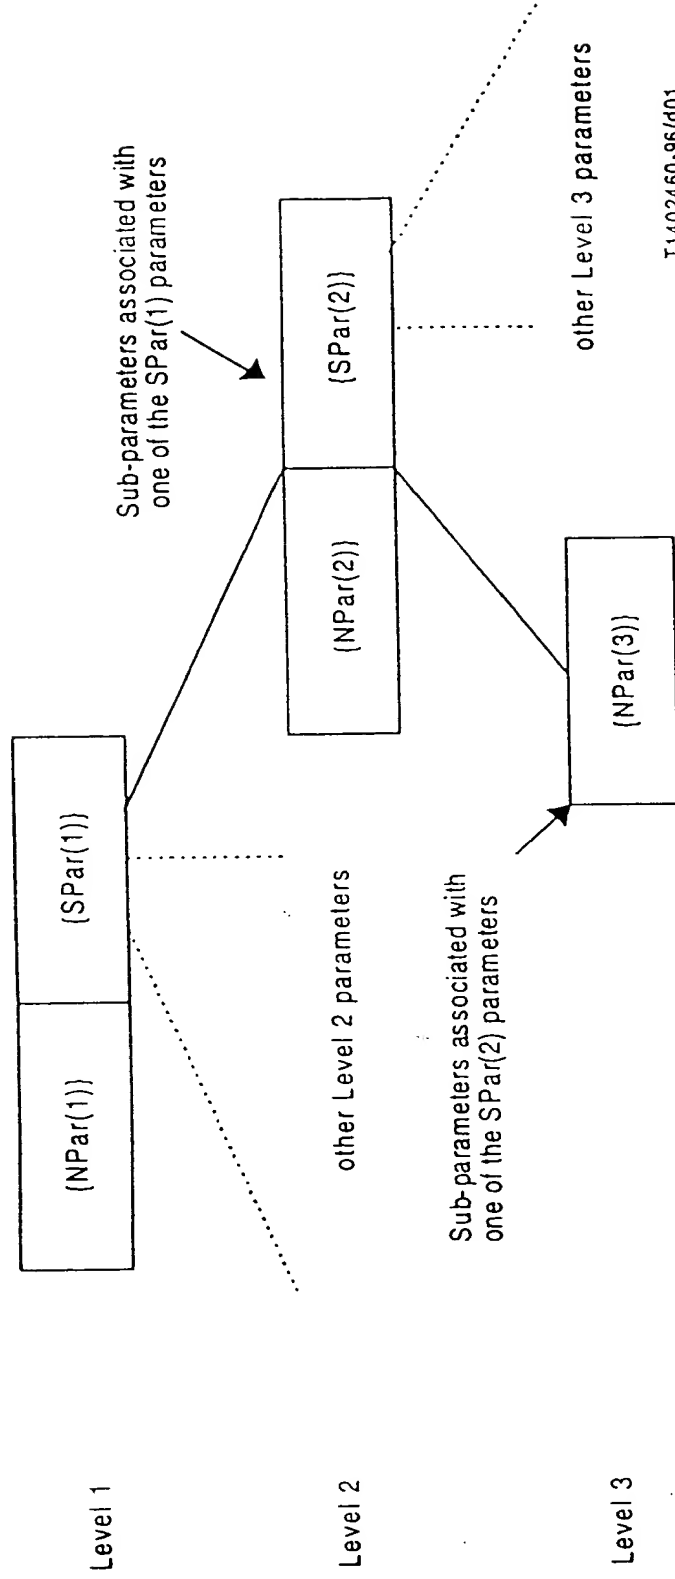

T1402460-96/d01

(NPar(n)) indicates a set of NPar parameters at level n in the tree

FIG. 11.

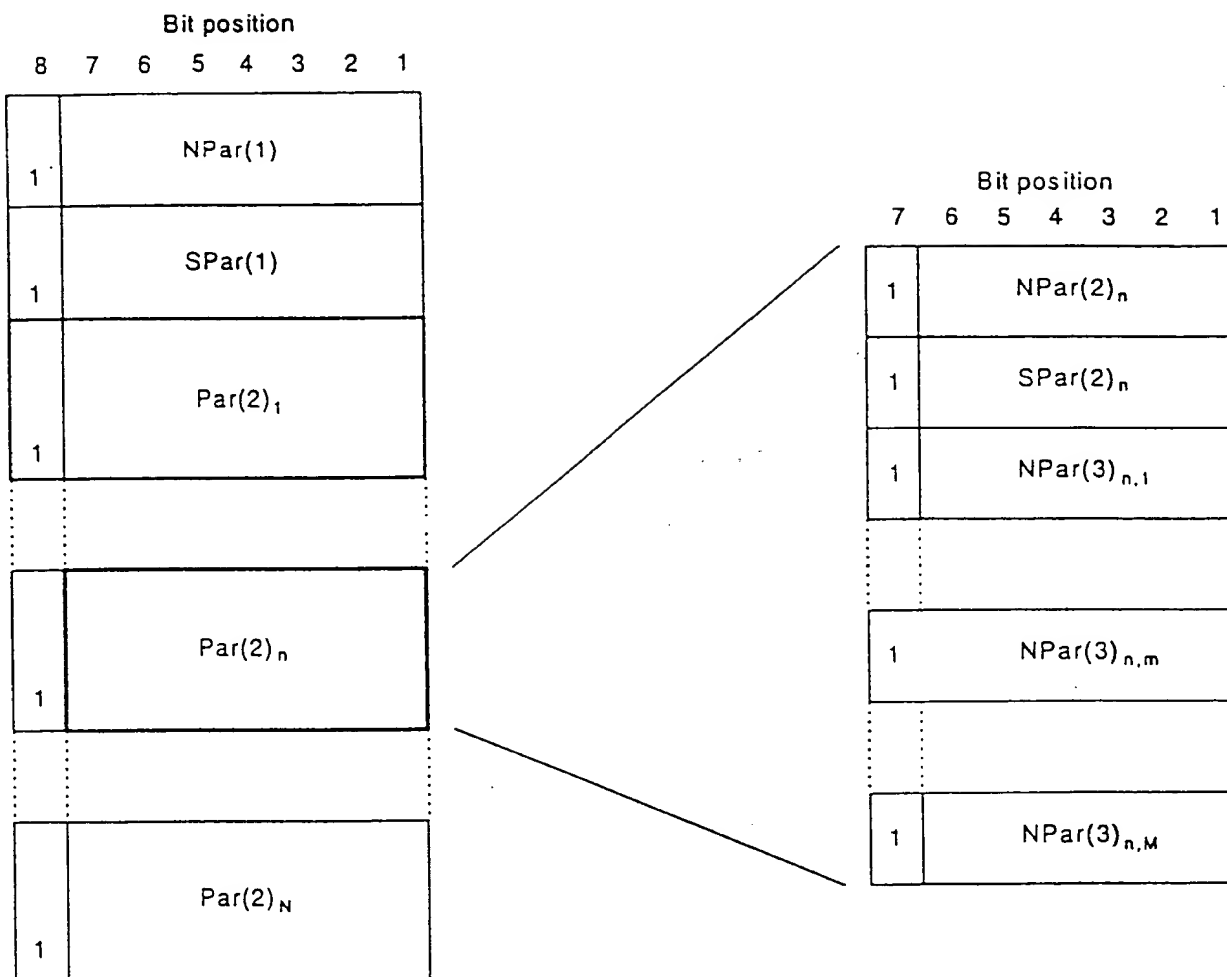


FIG. 12.

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Message type field	Revision number field	Vendor Identification	Bit-encoded parameter field
--------------------	-----------------------	-----------------------	-----------------------------

FIG. 13.

Non-standard information field (NS)			
Non-standard information block 1	Non-standard information block 2	—	Non-standard information block N

FIG. 14.

8	7	6	5	4	3	2	1
Non-standard information length = $2 + L + M + 1$ (1 octet)							
T.35 country code (2 octets)							
Provider code length = L (1 octet)							
T.35 provider code (L octets)							
Non-standard information (M octets)							

FIG. 15.

66760"ETB260